

SECTION 4 - Composite Cables

E&J

Services Limited

75 ohm co-axes with additional cores for power and telemetry.

RG59a/u + 2 cores, shotgun style, 100 metres
2 x 0.75mm cores, white pvc sheath

Order Ref.
C 243W1

RG59a/u + 2 cores, shotgun style, 200 metres
2 x 0.75mm cores, white pvc sheath

C 243W2

RG59a/u + 2 cores, shotgun style, 100 metres
2 x 0.75mm cores, black pvc sheath

C 242B1

RG59a/u + 2 cores, shotgun style, 200 metres
2 x 0.75mm cores, black pvc sheath

C 242B2

RG59a/u + 2 cores, shotgun style, LSF 100 metres
2 x 0.75mm cores, black LSF sheath

C 244B1

RG59a/u + 2 cores, shotgun style, LSF 100 metres
2 x 0.75mm cores, white LSF sheath

C 245W1

RG59b/u + 2 cores, shotgun style, 100 metres
2 x 0.5mm cores, black pvc sheath

C 240B1

RG59b/u + 2 cores, shotgun style, 200 metres
2 x 0.5mm cores, black pvc sheath

C 240B2

RG59b/u + 2 cores, shotgun style, LSF 100 metres
2 x 0.5mm cores, black LSF sheath

C 241B1

RG59b/u + 2 cores, shotgun style, LSF 200 metres
2 x 0.5mm cores, black LSF sheath


C 241B2

URM70 + 4 cores, black, LSF circular sheath,
2 x 0.5mm + 2 x 1mm cores, black LSF sheath

C 246BLSF

12 core + co-ax, BPT style, (VCM 130)
75 ohm coax + 9 x 0.75mm + 3 x 1mm cores

C 243W2

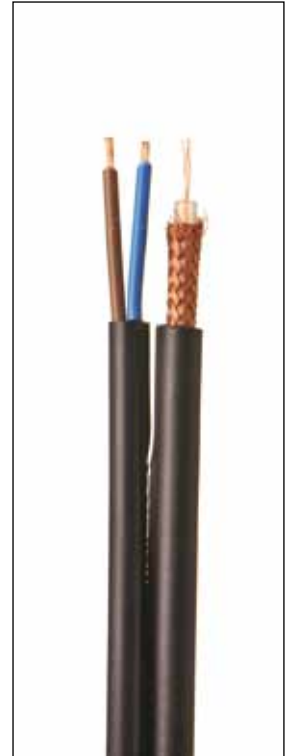

NO ACCOUNT – NO PROBLEM – we accept Visa or Mastercard