

## SECTION 5 - Cables

# E&J

Services Limited

### OVERALL FOIL SCREENED

16-2-6S 6 core, grey sheath  
 16-2-8S 8 core, grey sheath  
 16-2-12S 12 core, grey sheath

Order Ref.  
 C 324SR  
 C 322SR  
 C 320SR

Cables listed above normally supplied on 100 metre reels, longer lengths available if required

### EXTERNAL AND DIRECT BURIAL

7-2-12S PP, 12 core overall foil screen, PP sheath  
 7-2-6S PP, 6 core overall foil screen, PP sheath  
 7-2-8A PE, 8 core unscreened, external grade PE sheath  
 7-2-6A PE, 6 core unscreened, external grade PE sheath  
 7-2-10S LSF, 10 core overall foil screen, LSF sheath

Order Ref.  
 C 290PP5  
 C 296PP5  
 C 294APER  
 C 296APE5  
 C 292LSF

### Booklet cables.

**Mains flexes, - stranded copper conductors, pvc insulated, pvc sheathed in various colours, ref 2192Y, 2182Y, 2183Y, 3183Y. Supplied on 100 metre reels. To BS 6500**

2182Y, 0.5mm 2 core white 300/300V  
 2182Y, 0.5mm 2 core black 300/300V  
 2182Y, 0.75mm 2 core white 300/300V  
 2182Y, 0.75mm 2 core black 300/300V  
 2183Y, 0.5mm 3 core white 300/300V

Order Ref.  
 C 340W  
 C 340B  
 C 341W  
 C 341B  
 C 342W

2192Y, 0.5mm 2 core oval white 300/300V  
 2192Y, 0.75mm 2 core oval white 300/300V  
 2192Y, 0.75mm 2 core oval black 300/300V

C 343W  
 C 344W  
 C 344B1

3182Y, 0.75mm 2 core white 300/500V  
 3182Y, 0.75mm 2 core black 300/500V  
 3182Y, 1.0mm 2 core white 300/500V  
 3182Y, 1.0mm 2 core black 300/500V  
 3182Y, 1.5mm 2 core white 300/500V

C 344W  
 C 344B  
 C 346W  
 C 346B  
 C 348W

3183Y, 0.75mm 3 core white 300/500V  
 3183Y, 0.75mm 3 core black 300/500V  
 3183Y, 1.0mm 3 core white 300/500V  
 3183Y, 1.0mm 3 core black 300/500V  
 3183Y, 1.5mm 3 core white 300/500V  
 3183Y, 1.5mm 3 core black 300/500V  
 3183Y, 2.5mm 3 core white 300/500V

C 345W  
 C 345B  
 C 347W  
 C 347B  
 C 349W  
 C 349B  
 C 350W

3184Y, 1.0mm 4 core white 300/500V

C 347W4



0.75mm/1mm/1.5mm 2 and 3 core flexes available in LSOH sheath – 3182B and 3183B

For any other flexible not listed (3192Y,3182Y,3093Y,3184Y,3185Y,3192Y) please contact sales office for price and availability. Longer reel lengths (200m/500m) can be supplied.

**Armoured mains cable - copper conductors, XLPE insulated, pvc bedding, single steel wire armoured and black pvc outer sheath. 600/1000 volt, to BS 5467.**

Available P.O.A. from the sales office in various configurations – 2 core to 7 core and in conductor sizes 1.5mm up to 185mm. These cables cut to length.

Above cables supplied on 500 metre or 1,000 metre reels or cut to length. Larger conductor sizes and higher core counts available - p.o.a.

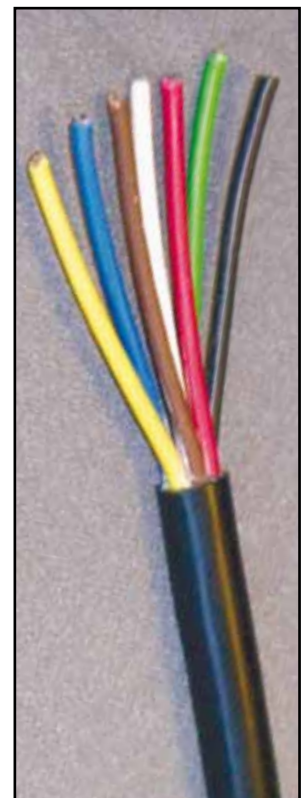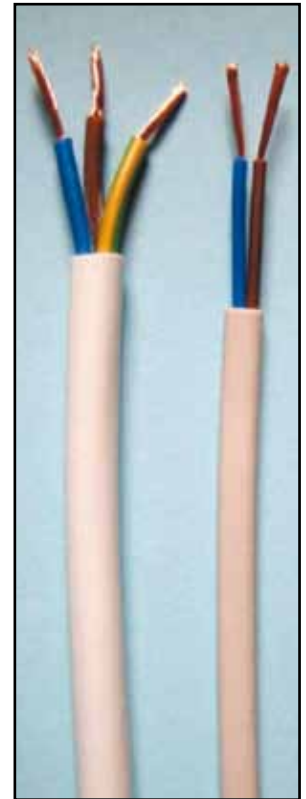

**SCHEDULED & CALL-OFF ORDERS WELCOME**