

SECTION 9 - Cable Manufacture



Internal Telephone Cables CW 1308


CONDUCTOR:	1/0.5mm plain annealed copper
SPECIFICATION:	Manufactured to British Telecom Specification CW 1308
INSULATION:	PVC, colour coded, ring mark
MAKE - UP	1 pair to 100 pair (optional earth)
EARTH WIRE	1/0.38 Plain Copper PVC Insulated
SHEATH COLOURS:	White / Black / Grey / Cream



Drop Wire No. 10 Specification CW 1378

CONDUCTOR:	1/0.5mm plain annealed copper
SPECIFICATION:	Manufactured to British Telecom Specification CW1378A
INSULATION:	PVC
CORE COLOURS	Orange / White / Green / Black)
STRENGTH MEMBERS	Brass Covered Steel -PVC Insulated
OUTER SHEATH	Polyethylene

Other Drop Wires Available

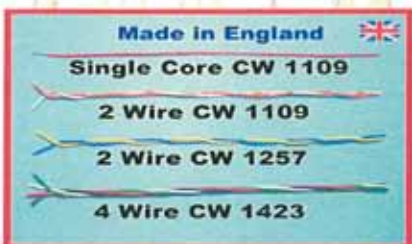

Jumper Wire Cw1257 CW1423 CW1109

CONDUCTOR:	1/0.5mm plain annealed copper
SPECIFICATION:	Manufactured to British Telecom Specification CW1257 CW1423 CW1109
INSULATION	CW1257 Radiation Cross Link PVC CW1423 Supercede the Above CW1109 Standard PVC
MAKE - UP	2 Wire - and - 4 Wire



Functional Earth Wire To CW 1044B

CONDUCTOR:	Single Core Annealed Copper Solid or Stranded Conductor
SPECIFICATION:	Manufactured to British Telecom Specification CW 1044B
INSULATION:	PVC
MAKE - UP	1.5mm To 25mm PVC Sheath Cream
EARTH WIRE	1/0.38 Plain Copper PVC Insulated
SHEATH COLOURS:	Cream PVC Sheath Printing With Black Characters



Available 2491B Zero Halogen Low Smoke

PVC Single Core To BS6004 & BS6500

CONDUCTOR:	Single Plain Annealed Solid or Stranded Copper Conductors
SPECIFICATION:	Manufactured to BS 6500 (0.5mm to 1.0mm) and BS6004 (1.5mm to 4.0mm)
INSULATION:	PVC OR LSOH
VOLTAGE RATING:	300 / 500V, 450 / 750V
SIZES:	0.5mm ² to 4.00mm ²
COLOURS:	Available in a Variety Colours

SCHEDULED & CALL-OFF ORDERS WELCOME