

SECTION 3 - Voice and Data Cables

Co-axial cable - to CW 1229C and CW 1383A - plain copper conductor, twin copper braid screened, white pvc outer sheath 75 ohm impedance..

BT2002 stranded conductor (7/0.2mm) 500 metre reels
BT2003 solid conductor (1/0.61mm) 500 metre reels
BT 3002 solid conductor (1/0.31mm) 500 metre reels
BT 3002 8 core and 16 core versions also supplied

Order Ref.

C 027B

C 027A

C 0275

If lengths other than 500 metres required, please check availability with sales office 01733-311592.

Data co-axials - 50 ohm and 93 ohm co-axials.

RG 58 c/u, 50 ohm, single braid screen, 500 metre reels
RG 58 c/u LSF, 50 ohm, single braid screen, 250 metre reels
9907 equivalent, 50 ohm, thin ethernet, 500 metre reels
9880 equivalent, 50 ohm, thick ethernet, 500 metre reels
RG 62 a/u, 93 ohm, 250 and 500 metre reels

Order Ref.


C 086B

C 086A

C 087

C 088

C 089

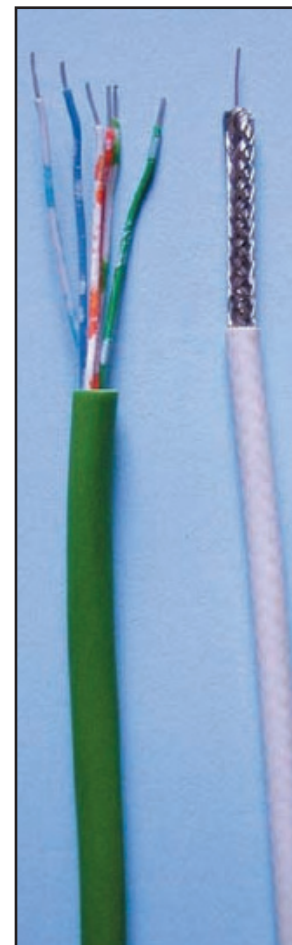

We can offer a cable design and manufacture service. If you require an existing cable in a non-standard colour or perhaps a different outer sheath then we can quote, or if you require printing or embossing on the cable for identification purposes, we can quote. Ring our sales office on 01733-311592 with your exact requirements and we will be pleased to quote.

We reserve the right to change specifications of cables without prior notice in line with any new specifications and changes which may be introduced.

ORDER BEFORE 4PM - FOR SAME DAY DESPATCH